

A

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE

NEW YORK, NEW YORK 10151

TEL: (212) 588-0800

FAX: (212) 588-0500

Date: September 15, 1999

Attorney Docket No.: 450100-02090

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office of an application for patent in the name(s) of:

Yoshihito ISHIBASHI

entitled:

CONTENT MANAGEMENT METHOD, AND CONTENT STORAGE SYSTEM

The following are enclosed:

- ☒ Specification (30 pages)
- ☒ 11 Sheet(s) of Drawings
- ☒ 41 Claim(s) (including 2 independent claim(s))
- ☐ This application contains a multiple dependent claim

- ☒ Our check for \$ 1138.00, calculated on the basis of the claims as amended by any enclosed preliminary amendment as follows:

Basic Fee, \$760.00 (\$380.00)	\$ 760.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each: 21	378.00
Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each:	-0-
Multiple Dependent Claim Fee at \$260.00 (\$130.00)	-0-
Total Filing Fee	\$ 1138.00
Assignment Recording Fee \$40.00	-0-

- ☒ Oath or Declaration and Power of Attorney
 - ☒ New ☐ signed ☒ unsigned
 - ☐ Copy from a prior application (37 C.F.R. 1.63(d))

- ☒ Certified copy of each of the following application(s) to substantiate the claim(s) for priority made in the Declaration:

<u>Application No.</u>	<u>Filed</u>	<u>In</u>
10-263694	17 September 1998	Japan

Please charge any additional fees required for the filing of this application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicant

By: William S. Frommer
William S. Frommer
Reg. No. 25,506

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE NEW YORK, NEW YORK 10151

WILLIAM S. FROMMER
WILLIAM F. LAWRENCE
EDGAR H. HAUG
MATTHEW K. RYAN
BARRY S. WHITE
THOMAS J. KOWALSKI
JOHN R. LANE
DENNIS M. SMID*
DANIEL C. BROWN
BARBARA Z. MORRISSEY
STEVEN M. AMUNDSON

September 15, 1999

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: U.S. Patent Application
Applicant: Yoshihito ISHIBASHI
Our Ref.: 450100-02090

A. THOMAS S. SAFFORD
MARILYN MATTHES BROGAN
JEROME ROSENSTOCK
RAYMOND R. WITTEKIND, Ph.D.
Of Counsel

Dear Sir:

Enclosed are papers constituting the above patent application which is being filed under 37 C.F.R. 1.53 without a signed Declaration. Please accord a filing date and a serial number to such application and inform the undersigned thereof so that a signed Declaration and the surcharge required by 37 C.F.R. 1.16(e) may be duly filed.

Please address all correspondence to:

JAMES K. STRONSKI
GORDON KESSLER
MARK W. RUSSELL*
BRUNO POLITO
JULIE BOWKER
GRACE L. PAN*
JEFFREY A. HOVDEN
JOE H. SHALLENBURGER
CHRISTIAN M. SMOLIZZA*
GLENN F. SAVIT
ROBERT E. COLLETTI
DEXTER T. CHANG

*Admitted to a Bar
other than New York

William S. Frommer, Esq.
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Respectfully,



William S. Frommer
Reg. No. 25,506
Attorney for Applicant
Enclosures

PATENT
450100-02090

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR LETTERS PATENT

TITLE: CONTENT MANAGEMENT METHOD, AND CONTENT
STORAGE SYSTEM

INVENTOR: Yoshihito ISHIBASHI

William S. Frommer
Registration No. 25,506
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

TITLE OF THE INVENTION

Content Management Method, and Content Storage System

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a content management method and content storage system, in which a content is stored in a storage for management.

2. Description of the Related Art

These days, there have been proposed many ways of data service to users by serving an encrypted content over satellite broadcasting, cable communication, internet communication or similar network.

FIG. 1 shows flows of delivery of a content and its key from a content provider to a user's receiver, as a typical one of the conventional data services.

As shown in FIG. 1, a content provider 101 has non-encrypted contents such as music data, video data, games, document data including books, static image data, etc. When the content provider 101 provides a content to a service provider 102, it encrypts it with a content key it holds or generates. The content provider 101 supplies the content key to a key management center 103 as well. The content key may be different from one content to another or a common one for all contents the content provider 101 serves.

The key management center 103 encrypts the content key supplied from the content provider 101 with a delivery key the key management center 103 holds (it

may be different from one user to another or a common one for all the users).

Upon request from a user, the key management center 103 supplies the content key encrypted with the delivery key to the user.

The user has a receiver 104 adapted to receive a content key-encrypted content from the service provider 102 over the satellite, cable, internet or other communications network. To enjoy the supplied content, the user has to decrypt the content. To this end, the receiver 104 requests the key management center 103 to send a content key for decryption of the content supplied to the user. Upon request for sending of the content key, the key management center 103 will send the content key to the receiver 104. At this time, the key management center 103 will also account the served content. The accounting may be made in various manners. For example, an amount billed for the supplied content is paid from a user's bank account registered at the key management center 103. A request is made to the user for information of his or her credit card number and an accounting is made according to the credit card number. Alternatively, the receiver 104 may be provided with an IC card storing a prepaid amount of money from which an amount of money billed for the supplied content can be paid. When the accounting is completely performed, the user will have the right for the supplied content.

The user having received the encrypted content key will decrypt the content key with a delivery key held in an internal storage unit 111 of the receiver 104 and uses the decrypted content key to decrypt the encrypted content.

information including requirements for a frequency and time length for using the content key, can freely be backed up, there is a likelihood that the requirements will not be applied any longer and thus the content key will unlimitedly be used. By writing an unused data over a data for which the required frequency of use has been decreased as it has been used, the frequency requirement can possibly be restored to its initial status. It should be noted that the time-length requirement is a number of days, for example, for which a data can be used after it is supplied to the user from the service provider. The permission of unlimited backup will disadvantageously lead to unlimited use of a content key.

To prevent an unlimited use of a content key, it has been proposed as shown in FIG. 3 to store in each of the first external storage unit 112 and second external storage unit 113 non-rewritable ID information and use the ID information and a storage key together for encryption of the content key. In this method, the content and content key are backed up or duplicated from the first external storage unit 112 to the second external storage unit 113 by copying the entire data in the first external storage unit 112 as shown in FIG. 2.

A content key is decrypted using ID information as will be described below:

First, the content key is encrypted with a key extracted from ID information (the ID information itself may be used as a key), and further encrypted with a storage key. On the assumption that the content key is K_c , storage key is K_s , identification information of the first external storage unit is ID1 and identification

information of the second external storage unit is ID2, the encryption can be expressed as follows:

$$K1 = \text{Enc}(Kc, ID1)$$

$$K2 = \text{Enc}(K1, Ks)$$

where “Enc(a, b)” indicates an encryption of the parenthesized data a with the data b taken as a key. That is, K2 thus obtained is an encrypted content key stored in the first external storage unit 112 and second external storage unit 113.

Then the receiver 104 decrypts the content key with data read from the first external storage unit 112 using the expression shown below:

$$K1 = \text{Dec}(K2, Ks)$$

$$Kc = \text{Dec}(K1, ID1)$$

where “Dec(c, d)” indicates a decryption of the parenthesized data c with the data d taken as a key. Thus, the receiver 104 can correctly extract a content key Kc based on the data stored in the first external storage unit 112.

On the other hand, to decrypt the content key with data taken out of the second external storage unit 113, the decryption will proceed with the expression shown below:

$$K1 = \text{Dec}(K2, Ks)$$

$$Kc = \text{Dec}(K1, ID2)$$

where “K1” to be decrypted with the identification information ID2 is Enc(Kc, ID1). Therefore, Kc cannot correctly be extracted because the ID information read

from the second external storage unit 113 is ID2 and cannot be rewritten.

The above-mentioned encryption and decryption permit to prevent unlimited backup of a content key but no recovery can be made with the backup content key.

OBJECT AND SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a content management method and content storage system, in which a content can be duplicated or backed up while being prevented from being copied.

The above object can be attained by providing a content management method and content storage system, for a data storage provided with a plurality of content storing means, in which a content key encrypted with a first storage key and stored along with a content encrypted with the content key in a first content storing means is decrypted with the first storage key, the content key obtained by the above decryption is encrypted with a newly generated second storage key and stored along with the encrypted content in a second content storing means.

In the above content management method and content storage system, the content key stored in the first content storing means is decrypted with the first storage key. In the content management method, the content key obtained by the above decryption is encrypted with the newly generated second storage key and stored in the second content storing means.

That is, the content key stored in the first content storing means is re-encrypted with the newly generated second storage key and stored in the second

content storing means, thereby allowing the second content storing means to back up the content key stored in the first content storing means.

These objects and other objects, features and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a conventional content service system;

FIG. 2 explains how in a receiver in the conventional content service system in FIG. 1, a content key stored in a first external storage unit is backed up by a second storage unit;

FIG. 3 explains how in the receiver in the conventional content service system in FIG. 1, the content key stored in the first external storage unit is backed up by the second storage unit through encryption and decryption of the content key with its own identification information;

FIG. 4 is a block diagram of an embodiment of content service system according to the present invention;

FIG. 5 is a block diagram of another embodiment of content service system according to the present invention;

FIG. 6 is a block diagram of a still another embodiment of content service system according to the present invention;

FIG. 7 is a block diagram of the content service system in which a receiver has a second external storage unit;

FIG. 8 explains how the receiver makes a request to a key management center for sending of a second storage key and the second storage key received by the receiver is stored into the second external storage unit;

FIG. 9 is a block diagram of the content service system in which the receiver has a random number generator which generates the second storage key;

FIG. 10 is a block diagram of the content service system in which the receiver generates a third storage key by encrypting the second storage key with an public key of the key management center;

FIG. 11 explains how the receiver sends to the key management center the third storage key generated by encrypting the second storage key with the public key of the key management center and is thus supplied with the second storage key from the key management center; and

FIG. 12 shows in detail a content key and use-permission information.

DETAILED DESCRIPTION OF THE INVENTION

First, the terminology used, and the processes referred to, in the illustration and description of the embodiments of the present invention will be described below.

“Content” includes all information which could be digital data and are valuable themselves. It includes, for example, music data, video data, games,

document data such as books, static image data, etc.

The encryption algorithm may be any algorithm which would be able to encrypt data in such a manner that it will not be known to any third party. For example, a public key encryption and common key encryption are generally known as the encryption algorithm. The public key encryption is an algorithm in which a key used for encryption is different from a key used for decryption, and includes RSA encryption and elliptic curve encryption, for example. In the public key encryption, a key laid open to the public is called “public key” and a key kept confidential by the user is called “secret key”. On the other hand, the common key encryption is an algorithm in which a key used for encryption is the same as a key used for decryption, and includes DES encryption, FEAL (of the Nippon Telegram and Telephone), Misty (of the Mitsubishi Electric), etc. for example. In the common key encryption, a key used is called “common key”.

A mutual authentication between users A and B in which a public key encryption is used to ascertain that they are a right match to each other, will be described with reference to FIG. 4.

It should be noted that for the user A, the public key is K_{pa} , secret key is K_{sa} and identification key is ID_a . Also note that for the user B, the public is K_{pb} , secret key is K_{sb} and identification key is ID_b . Further it should be noted that for an authentication station C, the public key is K_{pc} and secret key is K_{sc} .

A certificate Ca for validation of the public key K_{pa} for the user A will be

expressed as follows:

$$Ca = IDa + (\text{other information}) + Kpa + \text{Siga} \dots\dots\dots (1)$$

where “Siga” can be expressed as follows:

$$\text{Siga} = \text{Enc}(\text{Hash}(IDa + (\text{other information}) + Kpa), Ksc) \dots\dots (2)$$

where “Hash()” is a unidirectional function called “Hash function”. The Hash function is to compress a long data to a data having a predetermined bit length, thereby making it difficult to know an input from an output. The Hash function includes MD5, SHA-1, etc. for example. The “+” means a connection between data. For example, “16-bit data + 16-bit data” means that data are listed successively to produce a 32-bit data. The “Enc()” indicates an encryption which is a public key encryption (RSA encryption, for example). A certificate Cb for validation of the public key Kpb for the user B is similar to the certificate Ca. Also note that the “Dec()” indicates a decryption. That is to say,

$$Cb = IDb + (\text{other information}) + Kpb + \text{Sigb}.$$

The mutual authentication is effected following the procedure including the steps S1 to S4 as in FIG. 4. Note that the users A and B hold, in addition to their own key and ID information, the certificates Ca and Cb for their public keys and the public key Kpc for the authentication station C, respectively.

First at Step S1, the user A generates a random number R1. A relation (3) shown below is used to encrypt the random number R1 with Ksa to generate a random number R2. Then, Ca and R2 are sent to the user B.

$$R2 = \text{Enc}(R1, K_{sa}) \dots\dots\dots (3)$$

Next, the Hash function is used to generate R5 from R1 and R2 as given below:

$$R5 = \text{Hash}(R1, R2) \dots\dots\dots (7)$$

Then, R5 is encrypted with Ksa to generate R6 as given below. R6 is sent to the user B.

$$R6 = \text{Enc}(R5, Ksa) \dots\dots\dots (8)$$

Next at step S4, the user B uses the Hash function to generate R7 from R1 and R2 as given below:

$$R7 = \text{Hash}(R1, R2) \dots\dots\dots (9)$$

Then, R6 sent from the user A is decrypted with Kpa to generate R8 as given below:

$$R8 = \text{Dec}(R6, Kpa) \dots\dots\dots (10)$$

Then, comparison is made between R7 and R8. Match between them proves that the user A has Ksa. If no match is found between them, it means that the user A has fraudulently accessed the certificate Ca.

As in the foregoing, the users A and B can mutually authenticate that they are a valid match to each other. It should be noted that data such as the random number R1, etc. are used as a provisional key which will be called “session key”.

As an internal storage unit, any recording medium like a memory (flash memory, EEPROM, etc.) in a tamping-resistant single-chip IC incorporated in a receiver, an IC card capable of data communications with the receiver, or the like

may be used which would disable any third party from easy access to the data stored in them.

A recording medium or storage unit like a hard disc, optical disc, tape medium, semiconductor memory or the like may be used as external storage units. These external storage units may have written therein identification information (ID) by which they can be identified, respectively. The ID information should preferably be non-rewritable.

Data for backup of an encrypted content may be supplied from a third party or duplicated freely since the encrypted content itself cannot be accessed unless a content key is available.

An encrypted content key stored in the external storage unit includes in data of the key thereof use-permission information, fee, frequency for the use of the content key in addition to a decryption key for decryption of the content, and ID information for a receiver from which the content (or content key) has been purchased. The frequency referred to herein means information of a limited frequency for using a content key. For example, it is a number of times by which a content key can be decrypted and which is decreased by one each time the content key is decrypted.

The decryption of a content key is to decrypt a content key encrypted as having been described in the above to extract requirements for decryption of the content key. Namely, a content encrypted according to requirements for use of the

content is decrypted. If a frequency for decryption of a content key is limited to 10 times, for example, it is decreased by one each time the content key is decrypted, that is, the frequency becomes 9 times when the decryption is made once. Also, if the requirements include an inhibition of copying, copying of a content to any other equipment is limited against decryption of the content.

Next, an embodiment of data service system according to the present invention will be described with reference to a block diagram thereof in FIG. 5.

According to the present invention, the first embodiment of the data service system comprises, as shown in FIG. 5, a content provider 11 holding a non-encrypted content, a service provider 12 which serves the content held by the content provider 11 to users or subscribers over the satellite, cable, internet or similar communication network, a key management center 13 which manages content keys and accounts a content served to a user, and a receiver 14 which provides the content in the form of a sound or image. The receiver 14 has an internal storage unit 21 and also has an external storage unit 22 connected thereto.

How the content provided from the content provider 11 is sent to and stored into the external storage unit 22 of the receiver 14 of a user will be described herebelow with reference to FIG. 5.

The content provider 11 holding the non-encrypted content generates a content key (common key, for example) by a random number generator (not shown) and encrypts the content with the content key. The content provider 11 is

The receiver 14 owned by the user receives the encrypted content and content key sent from the service provider 12 over the satellite, cable, internet or similar communication network. The user having received the encrypted content and content key has to decrypt them for enjoying the content. To this end, the user acquires the decrypted content key as will be described below.

The receiver 14 sends the decrypted content key directly to the key management center 13. At this time, the encrypted content key may be stored in the external storage unit 22 once or not. That is, since the user has the delivery key used for encryption of the content key and cannot decrypt the content key, it sends the content key along with its own identification information and storage key to the key management center 13 once. The key management center 13 having received the content key, identification information and storage key decrypts the content key with its own delivery key and re-encrypts the content key with the storage key received from the user. Thereafter, the key management center 13 will account the served content based on the user's ID information and returns to the user the content key encrypted with the storage key.

These data may be sent as they are or after encrypted with a session key established by a mutual authentication. To encrypt the content key, etc, with the session key, the user may send no storage key to the key management center 13. In this case, after receiving the content key encrypted with the session key, etc., the user uses the session key to decrypt the content key, etc. once and then encrypts the content key with its own storage key.

Having received the content key, the receiver 14 stores into the external storage unit 22 the content key encrypted with the storage key. Since the storage key is stored in the internal storage unit 21, the content key can always be decrypted and the content key can be used to decrypt the content. It should be noted that although only one key is shown in each of the external and internal storage units 22 and 21 in FIG. 5, the content and content key may be stored in a larger number in each of the storage units in practice.

As in the foregoing, the content service system according to the present invention, a content held by the content provider 11 can be encrypted with a content key for service to the user and the content key used to encrypt the content can be encrypted with for supply to the user. Thus the user can decrypt the supplied content key to decrypt the content.

The key management center 13 may account a content service in any of the following three manners:

- (1) A user's back account number or credit card number related to user

identification information are held, and a money amount billed for the served content is paid from the bank or credit company based on the account or credit card number.

- (2) Each time, request is made to the user for sending his bank account number and credit card number together each time a key is send to the user, and an mount billed for the content service is paid from the bank account or credit company.
- (3) An amount billed for the content service is paid from an electronic money cumulated in the internal storage unit 21 of the receiver 14.

Also in the data service system, a delivery key may be held in the internal storage unit 21 of the receiver 14 in advance as shown in FIG. 6, and used to decrypt the content key. In this case, the user uses his own storage key to re-encrypt the content key decrypted with the delivery key, for storage into th external storage unit 22. Further, log information is prepared each time the content key is decrypted, and cumulated into the internal storage unit 21. In a predetermined time, when the delivery key has been decrypted a predetermined number of times or when the delivery key has been updated, the log information is sent to the key management center 13 for accounting the content service having so far been done.

It should be noted that when it is intended to pre-store the delivery key in the internal storage unit 21 as in the above, the delivery key used by the service provider 12 is updated at every predetermined period (one month, for example) and

the user is supplied with the delivery key from the key management center 13. Namely, the delivery key is varied from time to time for the purpose of safety since it is common to all the users.

As shown in FIG. 7, the receiver 14 comprises a second external storage unit 23. Here, how the content key stored in the external storage unit 22 (will be referred to as “first external storage unit” hereinafter) is duplicated or backed up into the second external storage unit 23, will be described herebelow.

In the data service system, the receiver 14 incorporates means 31 for decryption of data and key data, means 32 for encrypting data and key data and the internal storage unit 21 in which the storage key is stored. The receiver 14 further comprises the first external storage unit 22 to store a content, and the second external storage unit 23 to store a content. The receiver 14 is composed of a tampering-resistant IC chip, for example. The internal storage unit 21 is implemented using a flash memory inside the IC chip, while the decrypting means 31 and decrypting means 32 are implemented using ASIC and program.

The first external storage unit 22 stores a content key encrypted with a first storage key, and a content encrypted with the content key. The second external storage unit 23 stores an encrypted content key obtained by encrypting, in the encrypting means 32, the content key decrypted with the first storage key in the decrypting means 31, with a second storage key generated by the random number generator 34.

Thus, the first and second external storage units 22 and 23 store their respective identification information ID1 and ID2 as non-rewritable data.

The first external storage unit 22 is formed from a hard disk having an IEEE 1394 interface, for example. The second external storage unit 23 is formed from an optical disk drive having an IEEE 1394 interface, and an optical recording medium. In case the first and second external storage units 22 and 23 are a hard disc, for example, the identification information should be written in ROM to be read when a special command is given. In case the storage units 22 and 23 are an optical disc or the like, the identification information should be stored along a non-rewritable track.

In the data service system, the key management center 13 comprises a random number generator 34 to generate a storage key, and a storage unit 35 to store the storage key generated by the random number generator 34 and identification information of the external storage unit which store a content encrypted with the storage key. The storage unit 35 has stored therein various keys including a management key, the second storage key generated by the key management center 13, etc. for example.

Next, the data service system constructed as having been described functions as will be described below following the procedure in which the content key stored in the first external storage unit 22 of the receiver 14 is backed up.

When going to back up a content key the user has purchased, the user will

first send a storage key request command to the key management center 13 have the key management center 13 send a second storage key to the user. The storage key request command includes the identification information of the receiver 14, identification information ID2 for the second external storage unit which stores a backup data, etc.

Receiving the storage key request command, the key management center 13 generates a second storage key by means of the random number generator 34. The key management center 13 will store the second storage key and the supplied identification information ID2 for the second external storage unit 23 into the storage unit 35 while returning the second storage key to the receiver 14. At this time, the key management center 13 may account the content service based on the identification information of the user's receiver 14. Note that this accounting is rather a registration of the user than its literal meaning. Namely, the key management center 13 may register the user as having accessed the data service. The key management center 13 may be connected to the receiver 14 by an internet, cable or telephone communications network.

The receiver 14 will use the second storage key sent from the key management center 13 to back up the content key stored in the first storage unit 22. FIG. 8 shows in detail the flows of a procedure of processing the content key stored in the first external storage unit 22 during backup of a content.

Receiving the second storage key, the receiver 14 reads the content key from

the first storage unit 22 for decryption thereof. The procedure of this content key decryption comprises the steps of decrypting the content key with the first storage key stored in the internal storage unit 21 (in the steps (A) to (B) in FIG. 8), and re-decrypting the decrypted content key with the identification information ID1 of the first external storage unit 22 (in the steps (B) to (C) in FIG. 8).

Further, the receiver 14 encrypts the content key obtained by the above decryption and stores it into the second external storage unit 23. The procedure of this content key encryption and storage into the second external storage unit 23 comprises the steps of encrypting the content key with the identification information ID2 of the second external storage unit 23 (in the steps (C) to (D) in FIG. 8) and re-encrypting the encrypted content key with the second storage key having previously been received from the key management center 13 for storage into the second external storage unit 23 (in the steps (D) to (E) in FIG. 8).

Note that this encryption of the content key for storage into each external storage unit is effected using the identification information of the external storage unit into which the storage key and content key are stored. The encryption with the identification information will not be described and shown any longer in the following description and illustration of the present invention.

In this way, the content key stored in the first external storage unit 22 is backed up or duplicated into the second external storage unit 23. Thus it is possible to prevent any third part from fraudulently duplicating or copying the content key

and safely back up the content key in the first external storage unit. The key management center 13 can make an accounting to the user of the receiver 14 for the data service based on the request of content key backup, namely, based on the request for generation of the second storage key.

The backup procedure having been explained above is a basic one. The backup procedure will be described in further detail herebelow.

A third storage key may be generated based on the second storage key to back up the content. For generation of the second storage key, the second storage key is received from the key management center 13 in the aforementioned embodiment. As shown in FIG. 9, however, a random number generator 41 may be provided in the receiver 14 to generate a second storage key. In this case, the receiver 14 uses the public key of the key management center 13 existing in the internal storage unit 21 to encrypt the second storage key thus generated, to thereby provide a third storage key. The third storage key is stored into the second external storage unit 23.

As also shown in FIG. 10, the receiver 14 can use the public key to generate a third storage key based on the second storage key which is supplied from the key management center 13 based on a request made from the receiver 14 to the key management center 13 for sending of the second storage key to the user.

Thus, the content key can freely be backed up by encrypting the second storage key using the public key of the key management center 13. To decrypt the

backup content key, however, the secret key of the key management center 13 is required. Therefore, the key management center 13 can utilize this fact to account the content service when an access is made to the third storage key for decryption of the backup content key.

Also, a third storage key can be generated in the key management center 13. In this case, the key management center 13 generates a second storage key by means of the random number generator 34 while generating a third storage key by encrypting the second storage key with the management key held in the storage unit 35. The key management center 13 sends the third storage key along with the second storage key to the receiver 14 in which the third storage key is stored into the second external storage unit 23.

To generate the third storage key in the receiver 14, the public key of the key management center 13 is used. To generate the third storage key in the key management center 13, however, either the public key or the common key may be used as the management key to prevent any unprincipled third party from making a fraudulent access to the third storage key. If the common key is used in the receiver 14 to generate the third storage key, that key will be kept as it is in the internal storage unit 21 so that such an unprincipled third party can easily access the third storage key. On the other hand, the key stored in the key management center 13 is difficult to access by any third party, so any of the public or common key can be used to generate the third storage key in the key management center 13.

More specifically, the receiver 14 will request the key management center 13 for sending thereto the second storage key based on the identification information of the second external storage unit 23. That is to say, the receiver 14 reads the identification information ID2 from the second external storage unit 23 and sends it along with the identification information of the receiver 14 to the key management center 13. Upon reception of the identification information, the key management center 13 will search the second storage key from the internal storage unit 35 based on the identification information of the second external storage unit 23 and return it to the receiver 14. Thus, the second storage key is sent to the receiver 14 while the key management center 13 accounts for the data service in a predetermined manner based on the identification information of the receiver 14. The accounting is effected as having previously been described.

If the second storage key has been deleted after the third storage key is generated, the receiver 14 will be able to acquire a second storage key based on the third storage key, which has previously been described with reference to FIG. 11.

The receiver 14 sends the third storage key to the key management center 13 (in the steps (1) and (2) in FIG. 11). Note that the third storage key has been generated by encrypting the second storage key with either the public key or the management key of the key management center 13 (the same as the public key of the key management center 13) as previously mentioned. Also, the receiver 14 may send the third storage key along with the identification information of the receiver

14 and second external storage unit 23, respectively, to the key management center 13.

Receiving the third storage key, the key management center 13 decrypts it with the secret key held in the storage unit 35 to generate a second storage key (in the step (3) in FIG. 11), and then encrypts the second storage key with the session key (in the step (4) in FIG. 11). Note here that the session key has been established for example during a mutual authentication effected before data transfer between the key management center 13 and receiver 14.

The key management center 13 returns the data (the second storage key encrypted with the session key) to the receiver 14. The key management center 13 makes accounting in the predetermined manner at the time of returning the second storage key to the receiver 14.

The receiver 14 owns the same session key as that held by the key management center 13. The session key is stored in the internal storage unit 21 for example. In the receiver 14, the session key is used to decrypt the data sent from the key management center 13 to generate a second storage key (in the step (6) in FIG. 11). The second storage key is used to decrypt the content key (in the step (7) in FIG. 11).

As in the above, the third storage key encrypted with the public key of the key management center 13 is sent to the key management center 13. In the key management center 13, the third storage key is used to generate the second storage

[illegible][illegible][illegible][illegible]

[illegible][illegible][illegible][illegible]

first external storage unit 22, the receiver 14 compares the identification information of the first external storage unit 22 for which it is requested to restore the content key, with an identification signal of an external storage unit in which the content key has been backed up, that has been obtained from the second external storage unit 23 in which the content key restoration has already been made, and which is currently held in the receiver 14. Based on the comparison result, an error processing is effected.

The receiver 14 is adapted not to access any external storage unit in which a restored content key is stored by verifying the identification number stored in the internal storage unit 21, so that it can duplicate no content key by re-connecting the first external storage unit 22 which should have failed.

FIG. 12 shows examples of content key and use-permission information. In a first example, a key data with a content key "01ABCF54" has added thereto "unlimited" as reproduction limitation information indicating a limited number of times the content key can be used, "unlimited" as copy limitation information, and "analog only" as output information as shown in FIG. 12A. In a second example, a key data with a content key "86945ABC" has added thereto "100 times" as reproduction limitation information indicating a limited number of times the content key can be used, "analog only" as copy limitation information, and "digital with SCMS" as output information as shown in FIG. 12B.

The backup of the content key stored in the first external storage unit into

the second external storage unit has been described in the foregoing. Note that the external storage units may be any one which would be able to store data, such as a magnetic recording medium like a floppy diskette, optical recording medium like CD-R, or the like. Also, it may be an IC card having a writable memory.

The content management method according to the present invention is such that a content key encrypted with a first storage key and stored along with a content encrypted with the content key in a first content storing means is decrypted with the first storage key, the content key obtained by the above decryption is encrypted with a newly generated second storage key and stored along with the encrypted content in a second content storing means.

That is, the content key stored in the first content storing means is re-encrypted with the newly generated second storage key and stored in the second content storing means, thereby allowing the second content storing means to back up the content key stored in the first content storing means.

The content management method enables to safely duplicate (back up) a content while preventing the content from being copied fraudulently.

WHAT IS CLAIMED IS:

1. A content management method for a data storage provided with a plurality of content storing means, comprising the steps of:

decrypting, with a first storage key, a content key encrypted with the first storage key and stored along with a content encrypted with the content key in a first content storing means;

encrypting the content key obtained by the above decryption with a newly generated second storage key; and

storing the content key encrypted with the second storage key along with the encrypted content in a second content storing means.

2. The method as set forth in Claim 1, wherein the second storage key is generated based on a random number.

3. The method as set forth in Claim 1, wherein the content key obtained by the decryption is encrypted with identification information of the second content storing means and stored into the second content storing means.

4. The method as set forth in Claim 1, wherein the content key is encrypted, in the first content storing means, with the first storage key and identification information of the first content storing means, and the content key stored in the first content storing means is decrypted with the first storage key and identification information of the first content storing means.

5. The method as set forth in Claim 1, wherein the second storage key is

generated by a decrypted key generating means provided in the data storage.

6. The method as set forth in Claim 5, wherein the second storage key is encrypted with a public key for a key management unit for management of the storage keys to generate a third storage key and the third storage key is stored into the second content storing means.

7. The method as set forth in Claim 6, wherein the data storage deletes the second storage key depending upon whether the third storage key has been stored in the second content storing means.

8. The method as set forth in Claim 7, wherein when decrypting the content key stored in the second content storing means, the data storage sends the third storage key to the key management unit; and the key management unit generates a second storage key based on the third storage key while accounting the data service following a predetermined procedure.

9. The method as set forth in Claim 1, wherein the second storage key is generated by a storage key generating means provided in the key management unit which manages the storage keys; and the key management unit has stored therein the second storage key and the identification information of the second content storing means in which the content key encrypted with the above generated second storage key.

10. The method as set forth in Claim 9, wherein upon the generation of the second storage key, the key management unit accounts the data service following

the predetermined procedure.

11. The method as set forth in Claim 9, wherein the key management unit encrypts the second storage key with the management key to generate a third storage key, and sends the third storage key to the data storage; and the data storage stores the received third storage key into the second content storing means.

12. The method as set forth in Claim 11, wherein the data storage deletes the second storage key depending upon whether the third storage key has been stored in the second content storing means.

13. The method as set forth in Claim 12, wherein the key management unit has stored therein the identification information of the second content storing means in which the content key encrypted with the second storage key; the data storage sends, when decrypting the content key stored in the second content storing means, the identification information of the second content storing means to the key management unit; and the key management unit generates a second storage key based on the result of comparison between the identification information of the second content storing means, send from the data storage, and the identification information of the second content storing means, held in the key management unit itself, while accounting the data service following the predetermined procedure.

14. The method as set forth in Claim 1, wherein the second content storing means has stored therein the identification information of the data storage.

15. The method as set forth in Claim 14, wherein the data storage starts decrypting the content key stored in the second content storing means depending upon the result of an inspection of the identification information of the data storage, stored in the second content storing means.
16. The method as set forth in Claim 1, wherein the decrypted content key supplied from the second content storing means has added thereto information that the content key is a one obtained by restoration.
17. The method as set forth in Claim 16, wherein when moving the content key having added thereto the information that the content key is a restored one, the data storage makes an error process based on the result of comparison between the content key and a content key stored in a destination to which the content key is to be moved.
18. The method as set forth in Claim 1, wherein the content key has added thereto frequency information which limits the number of times the content key can be used.
19. The method as set forth in Claim 1, wherein the content key stored in the first content storing means is stored along with the identification information of the first content storing means into the second content storing means; the identification information stored in the second content storing means is stored into the data storage when the content key stored in the second content storing means is decrypted; and the data storage makes, when a request is made to decrypt the

content key in the first content storing means, an error process based on the result of comparison between the identification information of the first content storing means in consideration and the identification information of the second content storing means.

20. A content storage system, comprising:

a first content storing means having stored therein a content key encrypted with a first storage key and a content encrypted with the content key;

means for decrypting a data and key data;

means for encrypting the data and key data;

means for generating a storage key;

a second content storing means for storing an encrypted content key obtained by encrypting, in the encrypting means, the content key obtained by decryption with the first storage key in the decrypting means, using the second storage key generated by the storage key generating means, and the encrypted content; and

means for storing the storage keys.

21. The system as set forth in Claim 20, wherein the storage key storing means generates the second storage key by means of a random number generator.

22. The system as set forth in Claim 20, wherein a content key obtained by encrypting, in the encrypting means, the content key obtained by the decryption in the decrypting means, with the first storage key and identification information of

the second content storing means, is stored in the second content storing means.

23. The system as set forth in Claim 20, wherein the content key is encrypted, in the first content storing means, with the first storage key and identification information of the first content storing means; and the content key stored in the first content storing means is decrypted with the first storage key and identification information of the first content storing means.

24. The system as set forth in Claim 20, wherein the first content storing means, decrypting means, encrypting means, second content storing means, storage key storing means and storage key generating means form together a data storage; and further comprising a key management unit which manages the storage keys of the data storage.

25. The system as set forth in Claim 24, wherein the data storage is a data receiver which receives a content encrypted and sent from a data transmitter.

26. The system as set forth in Claim 24, further comprising means for storing the public key of the key management unit; and wherein the second content storing means has stored therein the second storage key along with a third storage key obtained by encrypting the second storage key with the public key.

27. The system as set forth in Claim 26, wherein the data storage deletes the second storage key depending upon whether the third storage key is stored in the second content storing means.

28. The system as set forth in Claim 27, wherein when decrypting the content

key stored in the second content storing means, the data storage sends the third storage key to the key management unit; and the key management unit sends a second storage key generated based on the third storage key to the data transmitter while accounting the data service following a predetermined procedure.

29. The system as set forth in Claim 24, wherein the second content storing means has stored therein the identification information of the data storage.

30. The system as set forth in Claim 29, wherein the data storage starts decrypting the content key stored in the second content storing means depending on the result of inspection of the identification information of the data storage, stored in the second content storing means.

31. The system as set forth in Claim 20, wherein the first content storing means, decrypting means, encrypting means, second content storing means and storage key storing means form together a data storage; and comprising the storage key generating means and further a key management unit which manages the storage keys of the data storage.

32. The system as set forth in Claim 31, wherein the data storage is a data receiver which receives a content encrypted and sent from a data transmitter.

33. The system as set forth in Claim 31, wherein the key management unit comprises an identification information storing means in which the storage key generated by the key management unit and the identification information of the content storing means in which the content key encrypted with the generated

storage key.

34. The system as set forth in Claim 31, wherein the key management unit accounts the data service following the predetermined procedure depending upon the generation of the storage key.

35. The system as set forth in Claim 31, wherein the key management unit comprises means for storing storage keys; the key management unit generates a third storage key by decrypting the second storage key with the storage key and sends it to the data storage; and the data storage stores the third storage key into the second content storing means.

36. The system as set forth in Claim 35, wherein the data storage deletes the second storage key depending upon whether the third storage key is stored into the second content storing means.

37. The system as set forth in Claim 36, wherein the key management unit comprises means for storing the second storage key and the identification information of the second content storing means in which the content key encrypted with the second storage key is stored; the key management unit accounts, when the data storage decrypts the content key, the data service following the predetermined procedure based on the result of comparison between the identification information of the second content storing means, sent from the data storage, and the identification information stored in the identification information storing means.

38. The system as set forth in Claim 31, wherein the second content storing means has stored therein the identification information of the data storage.
39. The system as set forth in Claim 38, wherein the data storage starts decrypting the content key stored in the second content storing means.
40. The system as set forth in Claim 20, wherein the content key obtained by decryption from the second content storing means has added thereto information that the content key is a one obtained by restoration, as requirement information.
41. The system as set forth in Claim 20, wherein the content key has added thereto frequency information which limits the number of times the content key can be used.

ABSTRACT OF THE DISCLOSURE

A content management method and content storage system are provided in which a content key encrypted with a first storage key and stored along with a content encrypted with the content key in a first content storing means is decrypted with the first storage key, the content key obtained by the above decryption is encrypted with a newly generated second storage key and stored along with the encrypted content in a second content storing means. Thus, the content management method enables to safely duplicate (back up) a content while preventing the content from being copied fraudulently.

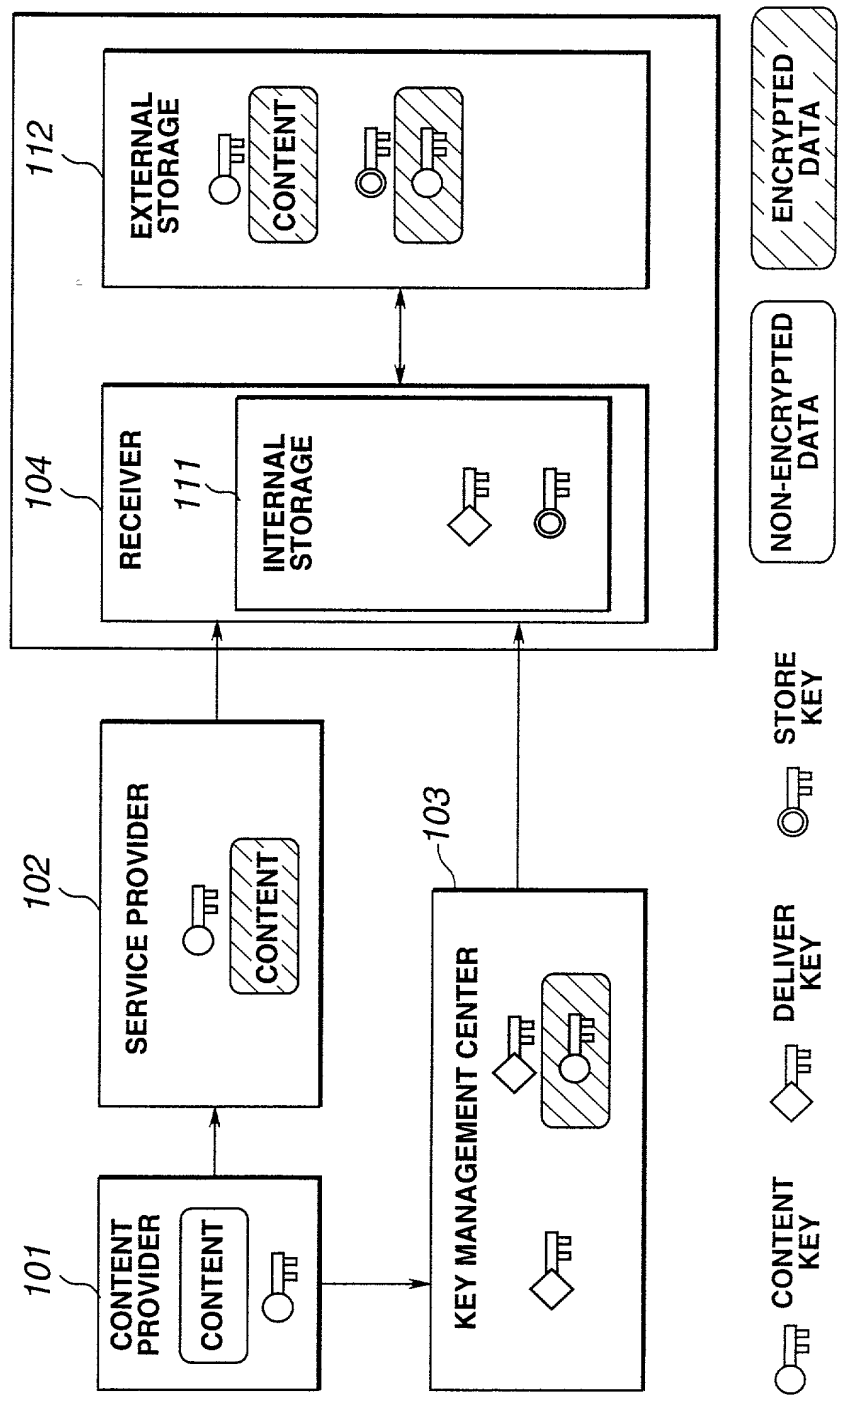


FIG.1

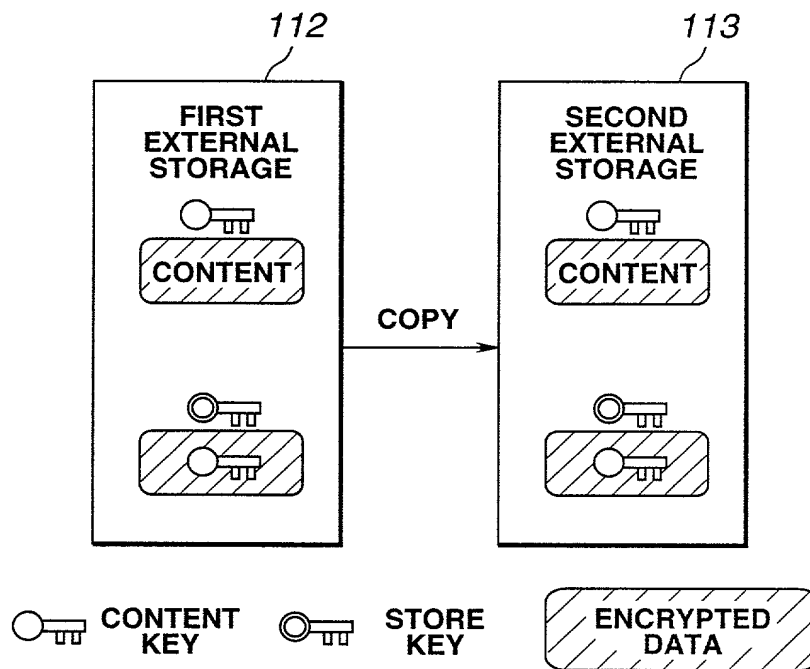


FIG.2

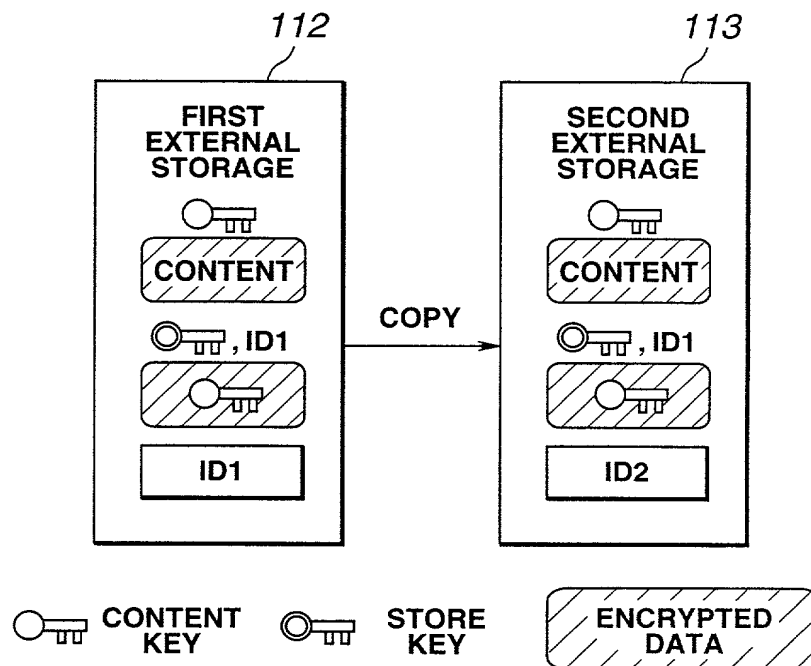


FIG.3

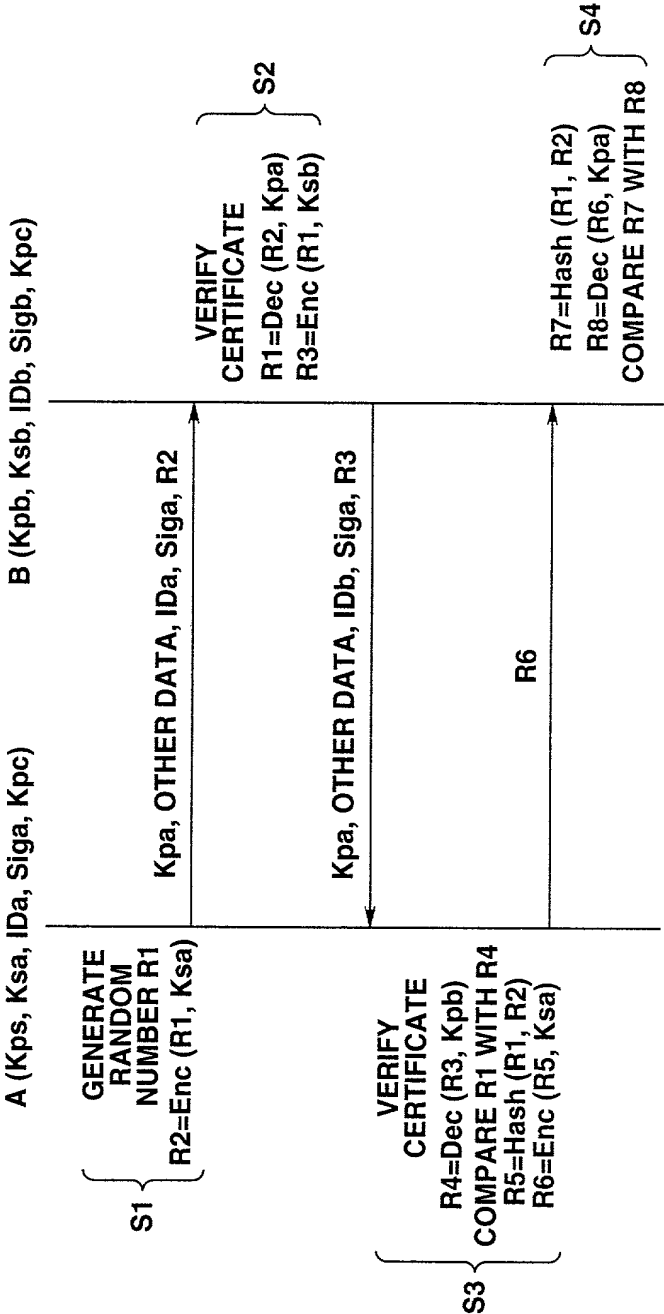


FIG.4

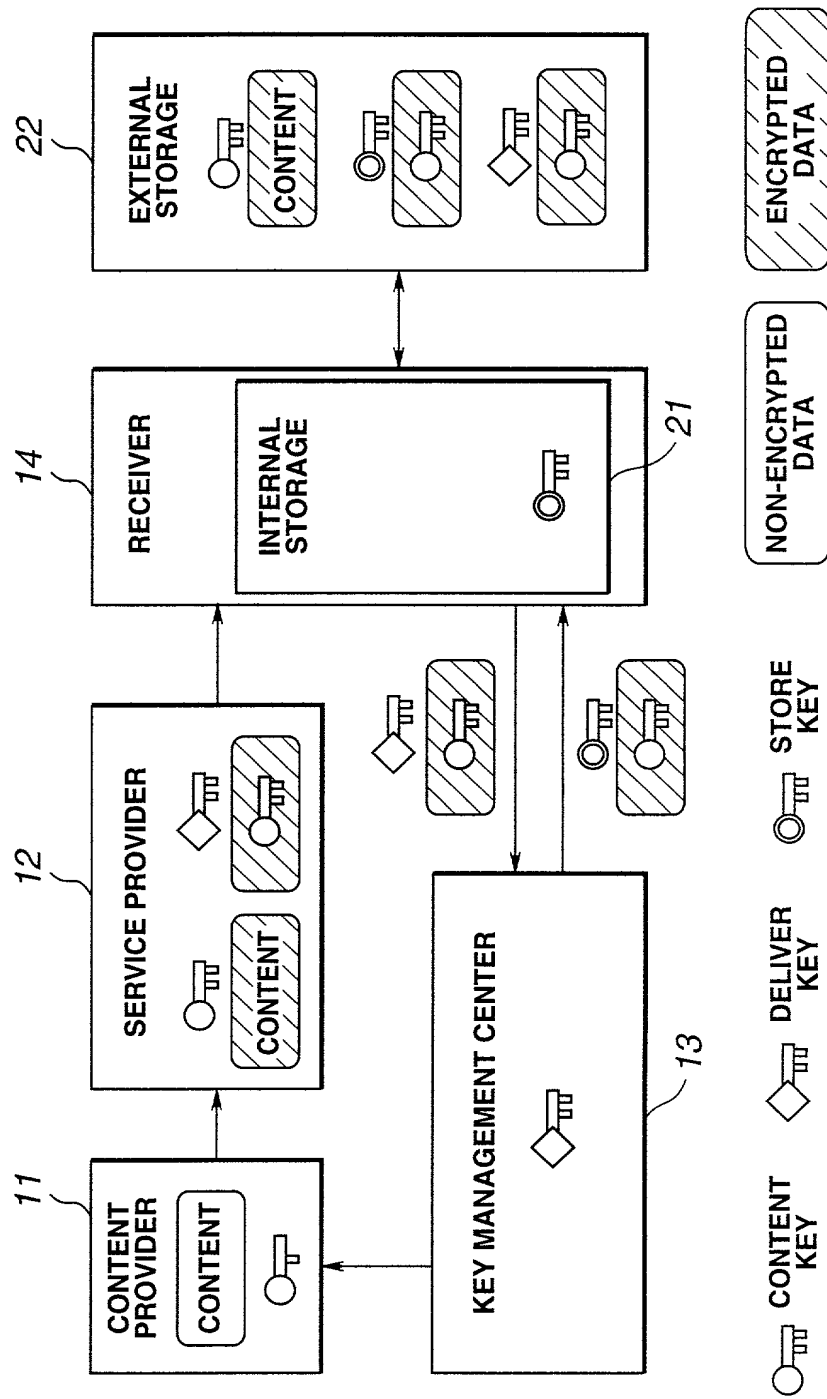


FIG. 5

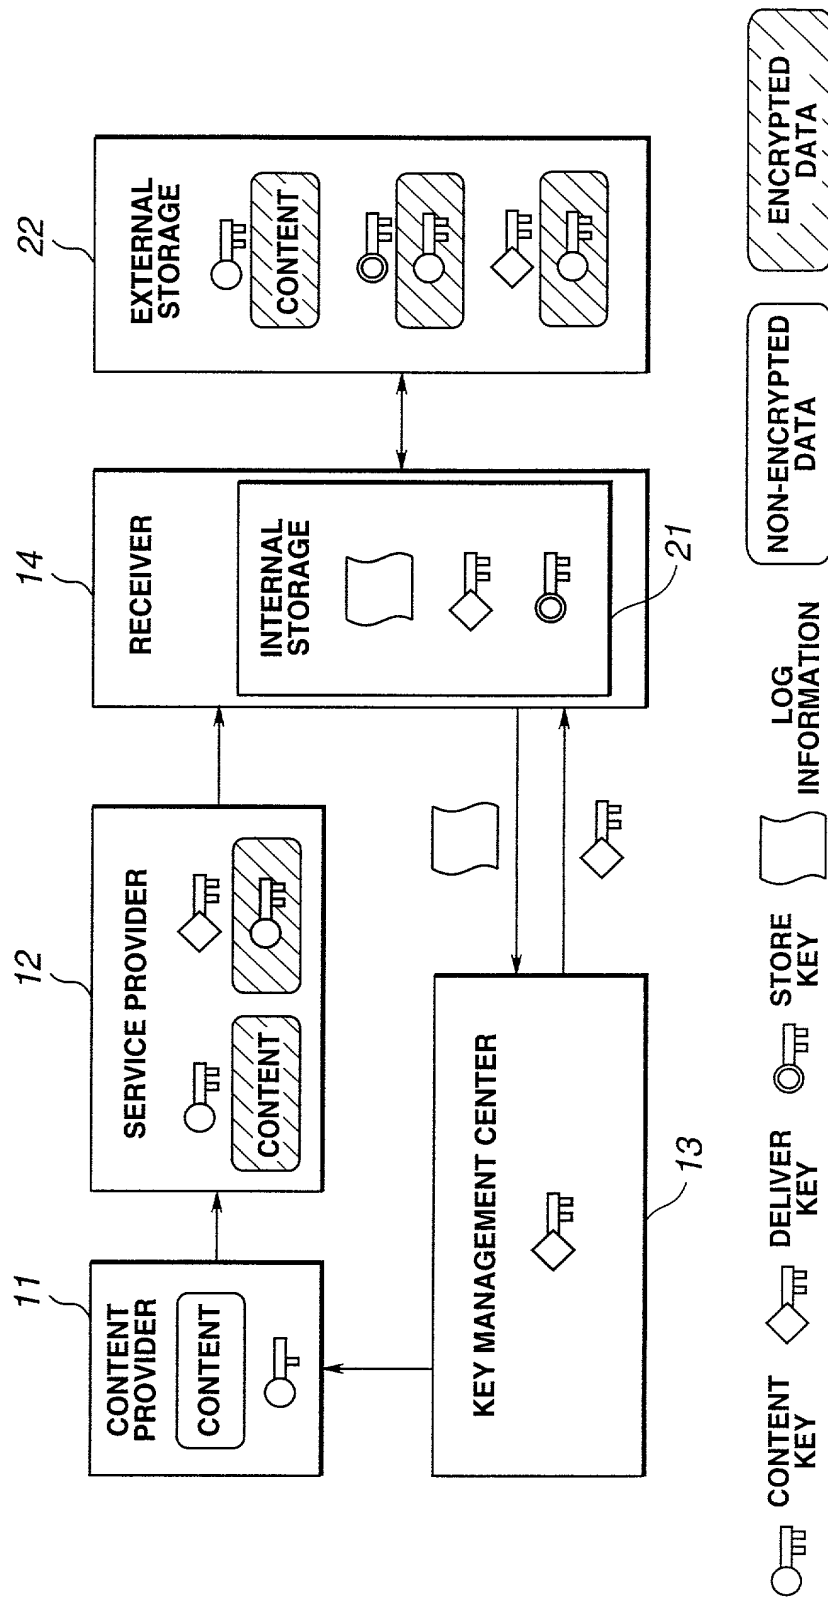


FIG. 6

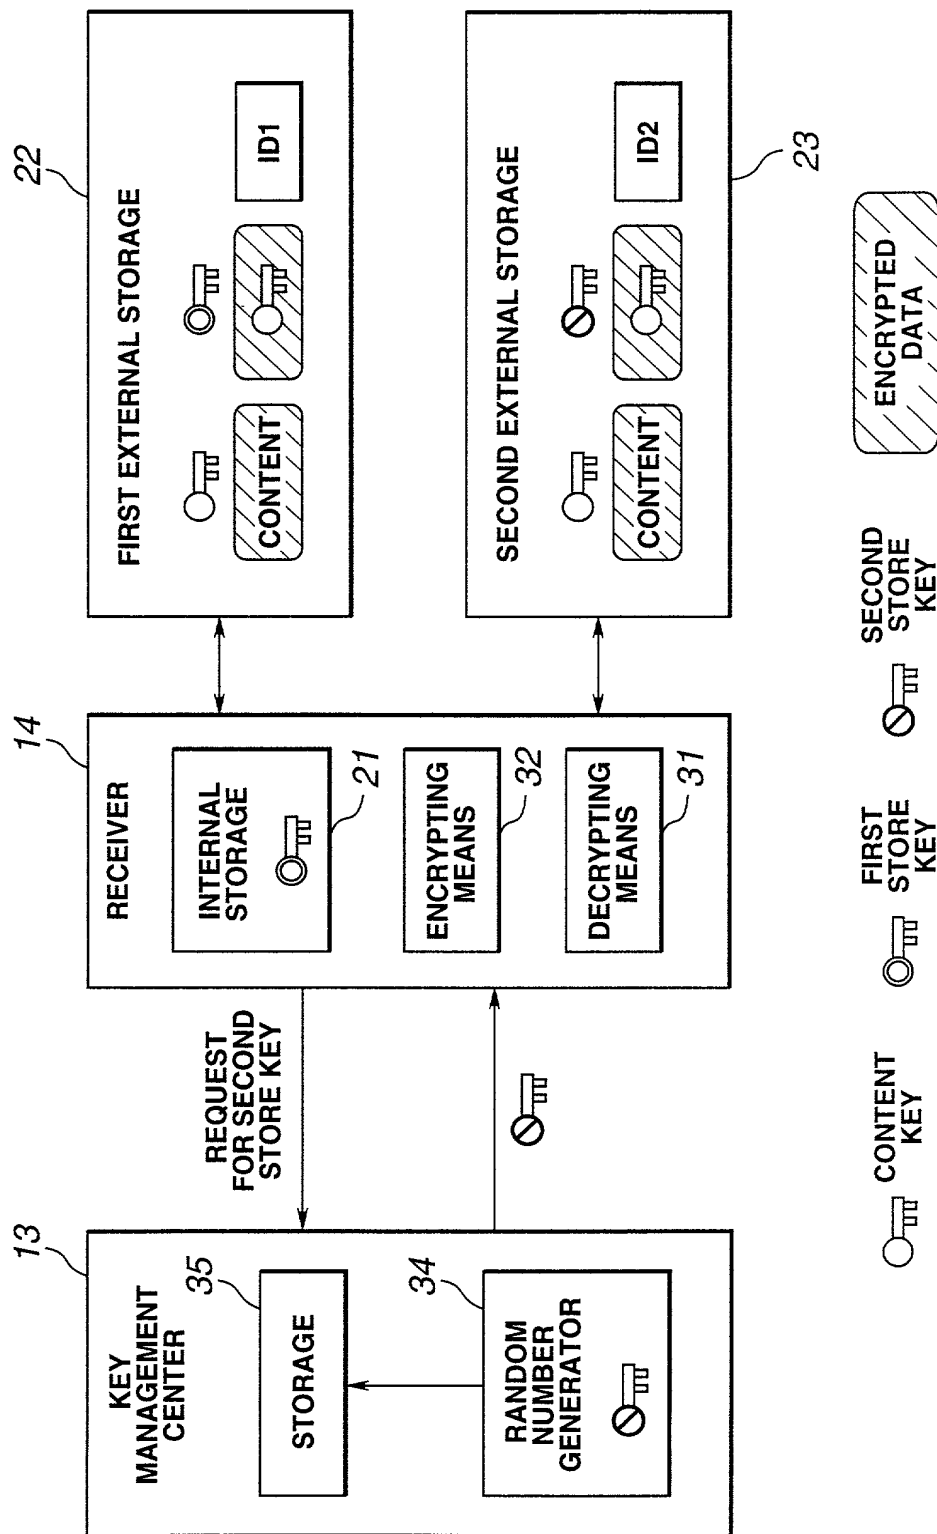


FIG. 7

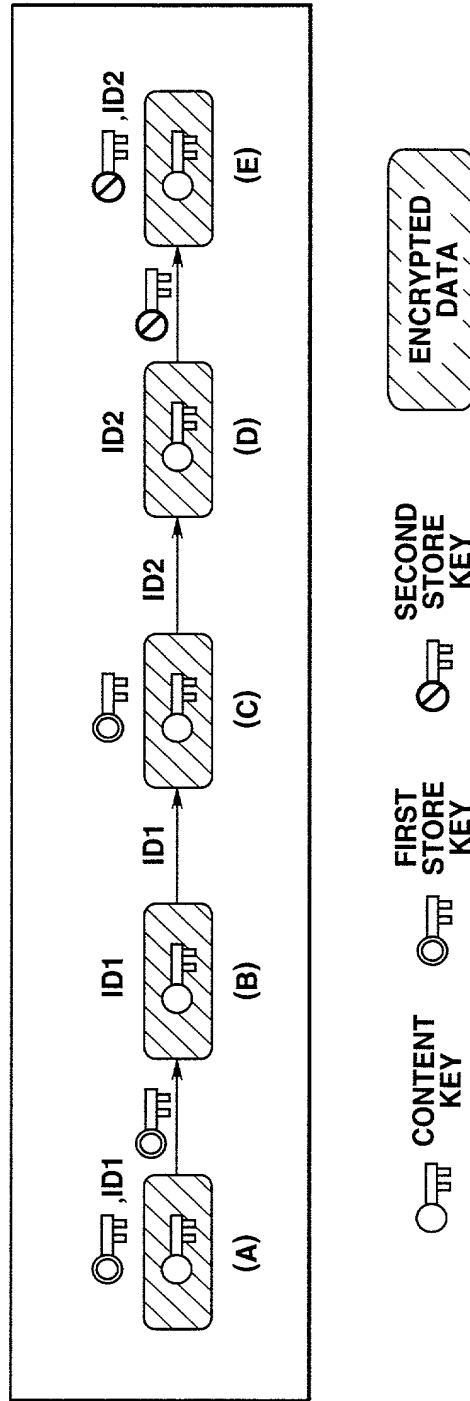


FIG.8

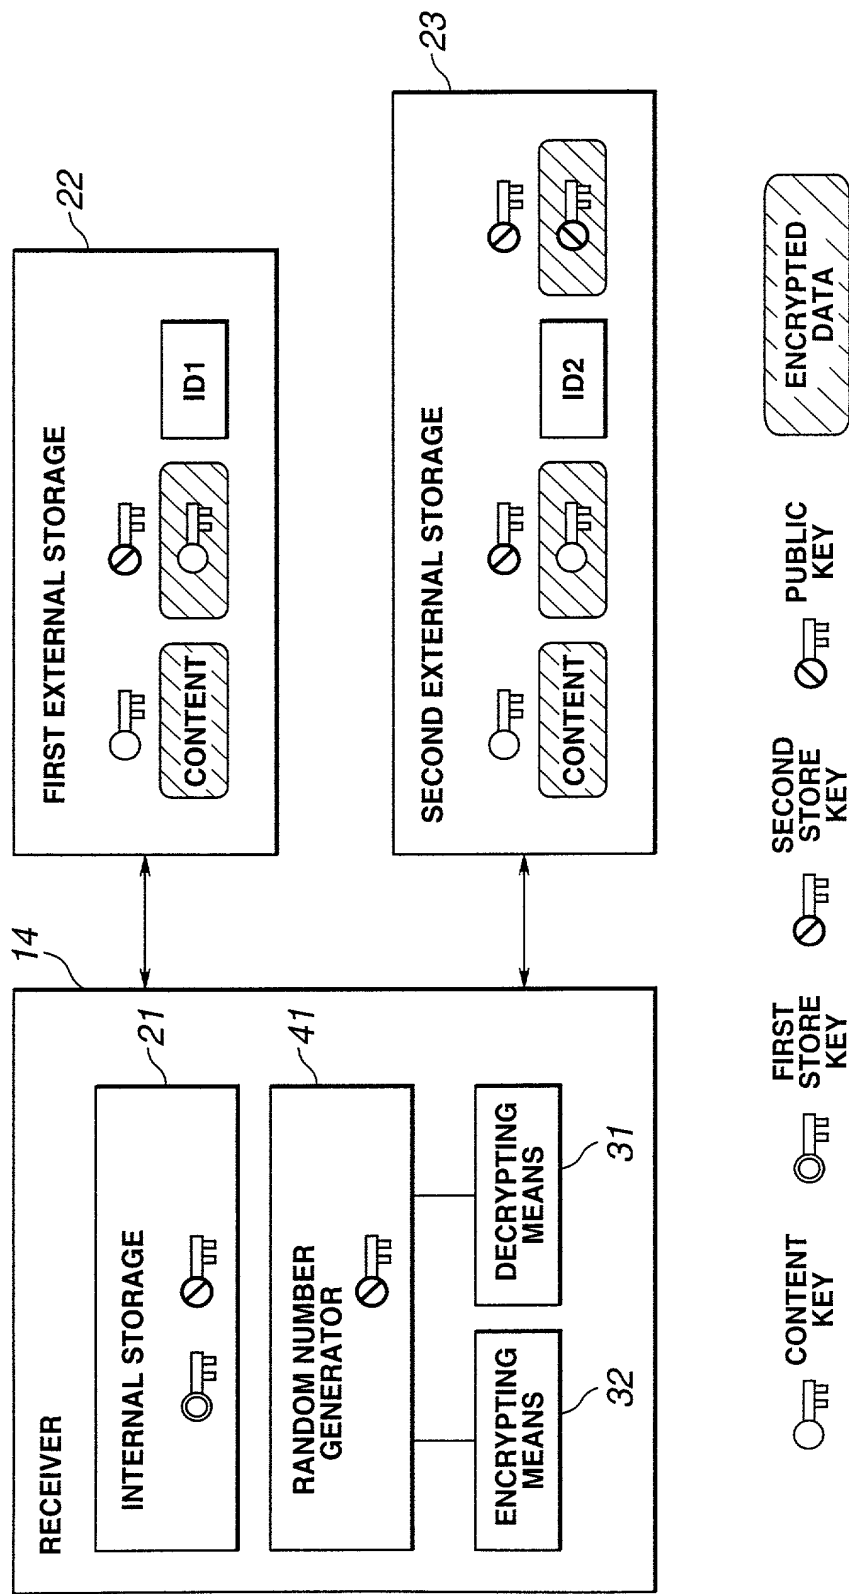


FIG.9

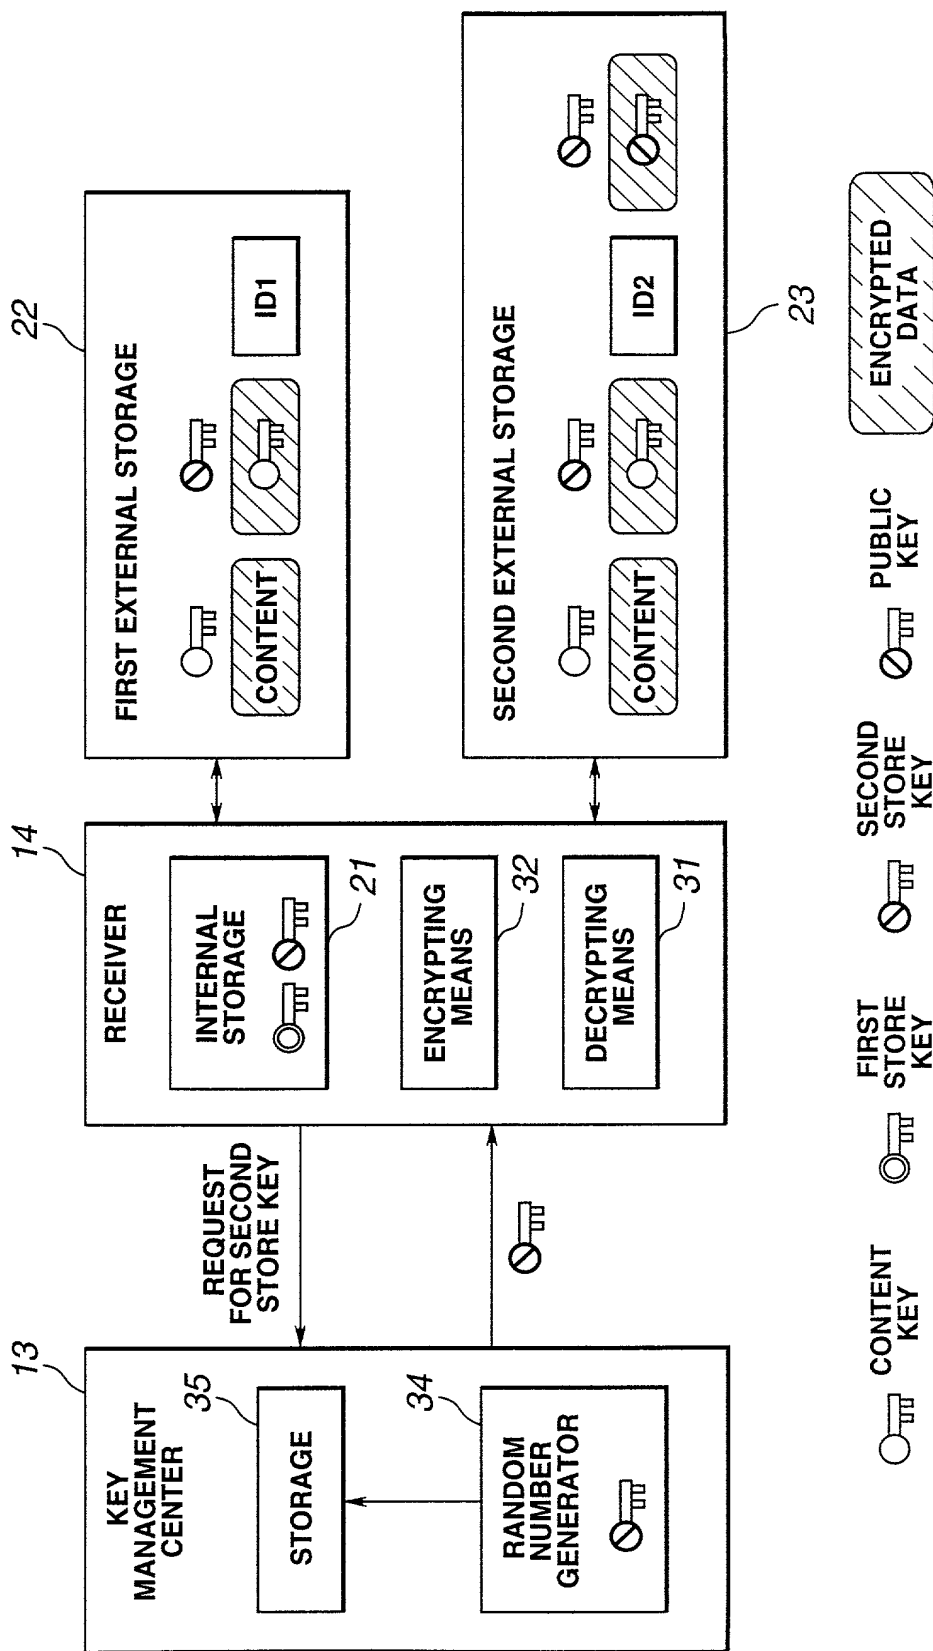


FIG.10

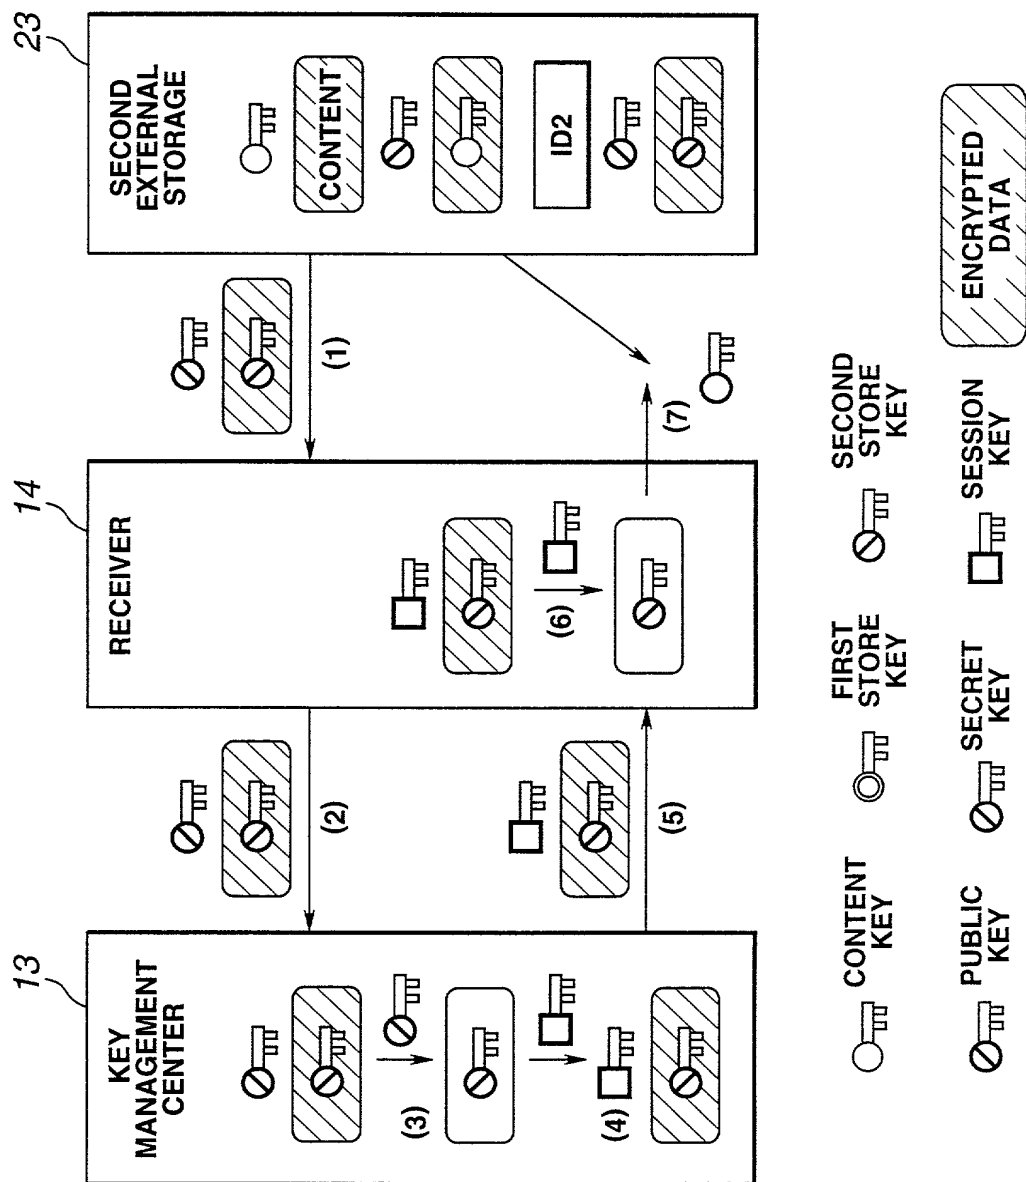


FIG.11

FIG.12A

KEY DATA 01ABCF54	REPRODUCTION LIMITATION INFORMATION UNLIMITED	COPY LIMITATION INFORMATION UNLIMITED	OUTPUT INFORMATION ANALOG ONLY
----------------------	--	---	--------------------------------------

FIG.12B

KEY DATA 86945ABC	REPRODUCTION LIMITATION INFORMATION 100 TIMES	COPY LIMITATION INFORMATION ANALOG ONLY	OUTPUT INFORMATION DIGITAL WITH SCMS
----------------------	--	---	---

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)

(Under 37 CFR § 1.63; with Power of Attorney)

FROMMER LAWRENCE & HAUG LLP

FLH File No. 450100-02090

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

CONTENT MANAGEMENT METHOD, AND CONTENT STORAGE SYSTEM

the specification of which

 X is attached hereto.

 was filed on as Application Serial No. ,

with amendment(s) through (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>	<u>[List additional applications on separate page]:</u>	<u>Priority Claimed:</u>
<u>Number:</u>	<u>Country:</u>	<u>Filed (Day/Month/Year):</u>
10-263694	Japan	17 September 1998
		<u>Yes</u> <u>No</u>
		X

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) [List additional applications on separate page]:
App'n. Ser. Number: Filed (Day/Month/Year): Status (patented, pending, abandoned):

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: _____ Date: _____

Full name of sole or first inventor: Yoshihito ISHIBASHI
Residence: Tokyo, Japan
Citizenship: Japan

Signature: _____ Date: _____

Full name of 2nd joint inventor (if any):
Residence:
Citizenship:

Signature: _____ Date: _____

Full name of 3rd joint inventor (if any):
Residence:
Citizenship:

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):

[If all inventors have the same post office address]

Sony Corporation
7-35 Kitashinagawa 6-chome
Shinagawa-Ku, Tokyo 141, Japan

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.